


ONYX

260X120 — 102,36"X47,24"

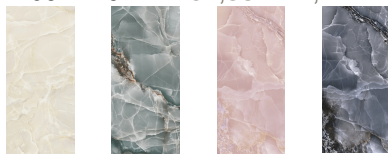

TR-45

TR-46

TR-46

TR-46

BP2612P BP2612RP BP2612RP BP2612RP

CARACTERÍSTICAS TÉCNICAS / TECHNICAL CHARACTERISTICS

Formato Size	Color Colour	MOHS (Dureza) Strength Resistance	PEI		DESPLIZAMIENTO GLIDE			Absorción de Agua Water Absorption	Resistencia Química / Chemical Resistance								Resistencia a las Manchas Stain Resistance			Resistencia Mecánica Mechanical Resistance			
			Clase Class	Etapa Abrasión Abrasion Stage	UNE-ENV 12633:2003	DIN 51130**	DIN 51097**		P.D. Limpieza Cleaning	Aditivos Agua Piscina Additive pools water	Ácidos y Alcalis Acids and Alkalis (Baja concentración) (Low concentration)				Ácidos y Alkalís Acids and Alkalis (Alta concentración) (High concentration)				Con Acción Trazante Tracing Action	Con Acción Química Oxidante Chemical Oxidize Action	Con Acción Fílmica Filmic Action	Resistencia a la helada Frost Resistance	Resistencia a la flexión Bending Resistance
											Ácido Cloríd. Hydrochloric Acid	Ácido Cítrico. Citric Acid	Hidróxido Potásico Potassium Hydroxide	Ácido Cloríd. Hydrochloric Acid	Ácido Láctico Lactic Acid	Hidróxido Potásico Potassium Hydroxide							
260X120	Sable	4	4	6000	0			<0,5%	GA	GA	GLA	GLA	GLA	GHB		GHB	5	5	5	RESISTE	>35N/mm2		
	Turquoise	4	3	750	0			<0,5%	GA	GA	GLA	GLA	GLA	GHB		GHB	5	5	5	RESISTE	>35N/mm2		
	Rose	4	3	1500	0			<0,5%	GA	GA	GLA	GLA	GLA	GHB		GHB	5	5	5	RESISTE	>35N/mm2		
	Bleu	4	2	600	0			<0,5%	GA	GA	GLA	GLA	GLA	GHB		GHB	5	5	5	RESISTE	>35N/mm2		



Se aconseja uso del Sistema Nivelado

We recommend using Levelling System to fix the tiles

Fecha: 15/04/2026

BALDOCER