

ELECTRA

280X120 — 110,24"X47,24"



R10
R10



Rectificado
Rectified



Antihielo
Frost proof



No Repetitivo
No Repetitive



Dest. Medio(v3)
Shade Variation: Medium



Mate
Matt




Polivalente
Versatile



Tierra Coloreada
Colored body



Porcelánico
Porcelain

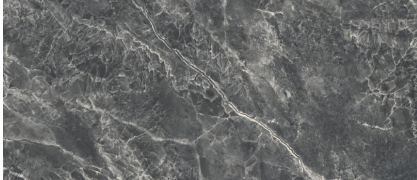

ELECTRA BLACK NATURAL
BP2812RE

CARACTERÍSTICAS TÉCNICAS / TECHNICAL CHARACTERISTICS

Formato Size	Color Colour	MOHS (Dureza) Strength Resistance	PEI		DESPLAZAMIENTO GLIDE			Absorción de Agua Water Absorption	Resistencia Química / Chemical Resistance								Resistencia a las Manchas Stain Resistance			Resistencia Mecánica Mechanical Resistance			
			Clase Class	Etapa Abrasión Abrasion Stage	UNE-ENV 12633:2003	DIN 51130**	DIN 51097**		P.D. Limpieza Cleaning	Aditivos Agua Piscina Additive pools water	Ácidos y Alcalis Acids and Alkalis (Baja concentración) (Low concentration)				Ácidos y Alcalis Acids and Alkalis (Alta concentración) (High concentration)				Con Acción Trazante Tracing Action	Con Acción Química Oxidante Chemical Oxidize Action	Con Acción Filmica Filmic Action	Resistencia a la helada Frost Resistance	Resistencia a la flexión Bending Resistance
											PÉNDULO PENDULUM	RAMPA RAMP	PIE DESCALZO BARE FOOT	Ácido Clorid. Hydrochloric Acid	Ácido Cítrico. Citric Acid	Hidróxido Potásico Potassium Hydroxide	Ácido Clorid. Hydrochloric Acid	Ácido Láctico Lactic Acid					
280X120	Black	5	2	600	1	R10		<0,5%	GA	GA	GLA	GLA	GLA	GHA		GHA	5	5	5	RESISTE	>35N/mm ²		



Se aconseja uso del Sistema Nivelado
We recommend using Levelling System to fix the tiles

Fecha: 09/04/2026

BALDOCER