

FONTANA

60X120 — 23,62"X47,24"



Rectificado
Rectified



Antihielo
Frost proof



No Repetitivo
No Repetitive



Dest. Medio(v3)
Shade Variation: Medium




Satinado
Satin



Polivalente
Versatile



Porcelánico
Porcelain

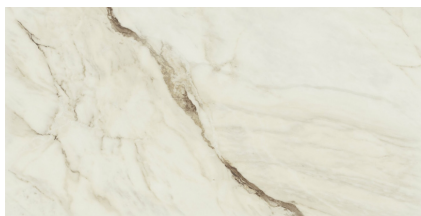

FONTANA NATURAL
BT6012LB

CARACTERÍSTICAS TÉCNICAS / TECHNICAL CHARACTERISTICS

Formato Size	Color Colour	MOHS (Dureza) Strength Resistance	PEI		DESLIZAMIENTO GLIDE			Absorción de Agua Water Absorption	Resistencia Química / Chemical Resistance								Resistencia a las Manchas Stain Resistance			Resistencia Mecánica Mechanical Resistance	
			Clase Class	Etapa Abrasión Abrasion Stage	UNE-ENV 12633:2003	DIN 51130**	DIN 51097**		P.D. Limpieza Cleaning	Ácidos y Alcalis Acids and Alkalis (Baja concentración) (Low concentration)		Ácidos y Alcalis Acids and Alkalis (Alta concentración) (High concentration)		Con Acción Trazante Tracing Action			Con Acción Química Oxidante Chemical Oxidize Action	Con Acción Filmic Filmic Action	Resistencia a la helada Frost Resistance	Resistencia a la flexión Bending Resistance	
60X120	Natural	5	4	6000	0	0	<0,5%	GA	GA	GLA	GLA	GLA	GHA		GHA	5	5	5	RESISTE	>35N/mm2	

EMBALAJE / PACKING LIST

	Pcs / Cajas Pcs / Box	M2 / Cajas Sqm / Box (aprox.)	Kg / Cajas Kg / Box	Cajas / Palet Boxes / Pallet	M2 / Palet Sqm / Pallet (aprox.)	Kg / Palet Kg / Pallet	Pulgadas Inches
60X120	2	1.44	20	50	72	1000	



Se aconseja uso del Sistema Nivelado
We recommend using Levelling System to fix the tiles

Fecha: 17/04/2026

BALDOCER